


Module 2: Computer-System Structures

- Computer System Operation
- I/O Structure
- Storage Structure
- Storage Hierarchy
- Hardware Protection
- General System Architecture

Operating System Concepts 2.1 Silberschatz and Galvin©1999

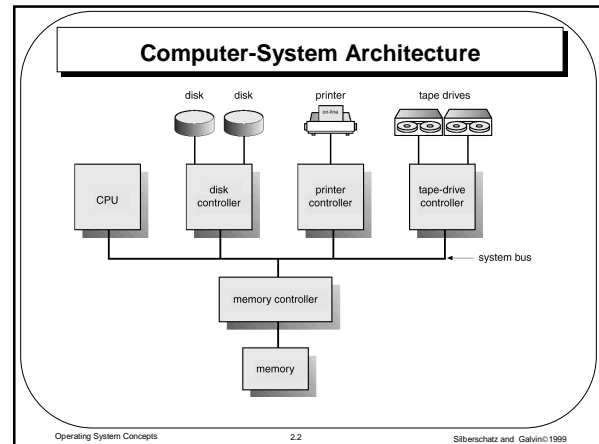

Computer-System Operation

- I/O devices and the CPU can execute concurrently.
- Each device controller is in charge of a particular device type.
- Each device controller has a local buffer.
- CPU moves data from/to main memory to/from local buffers
- I/O is from the device to local buffer of controller.
- Device controller informs CPU that it has finished its operation by causing an *interrupt*.

Operating System Concepts 2.3 Silberschatz and Galvin©1999

Common Functions of Interrupts


- Interrupt transfers control to the interrupt service routine generally, through the *interrupt vector*, which contains the addresses of all the service routines.
- Interrupt architecture must save the address of the interrupted instruction.
- Incoming interrupts are *disabled* while another interrupt is being processed to prevent a *lost interrupt*.
- A *trap* is a software-generated interrupt caused either by an error or a user request.
- An operating system is *interrupt driven*.

Operating System Concepts 2.4 Silberschatz and Galvin©1999

Interrupt Handling

- The operating system preserves the state of the CPU by storing registers and the program counter.
- Determines which type of interrupt has occurred:
 - *polling*
 - vectored interrupt system
- Separate segments of code determine what action should be taken for each type of interrupt

Operating System Concepts 2.5 Silberschatz and Galvin©1999

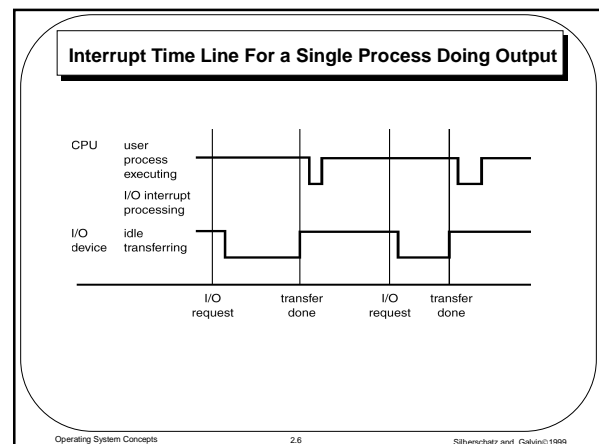

I/O Structure

- After I/O starts, control returns to user program only upon I/O completion.
 - wait instruction idles the CPU until the next interrupt
 - wait loop (contention for memory access).
 - At most one I/O request is outstanding at a time, no simultaneous I/O processing.
- After I/O starts, control returns to user program without waiting for I/O completion.
 - *System call* – request to the operating system to allow user to wait for I/O completion.
 - *Device-status table* contains entry for each I/O device indicating its type, address, and state.
 - Operating system indexes into I/O device table to determine device status and to modify table entry to include interrupt.

Operating System Concepts 2.7 Silberschatz and Galvin©1999

Two I/O methods

Synchronous

(a)

Asynchronous

(b)

Operating System Concepts 2.8 Silberschatz and Galvin©1999

Device-Status Table

device: card reader 1 status: idle		
device: line printer 3 status: busy	request for line printer address: 38546 length: 1372	⏏
device: disk unit 1 status: idle		
device: disk unit 2 status: idle		
device: disk unit 3 status: busy	request for disk unit 3	request for disk unit 3
⋮	file: xxx operation: read address: 43046 length: 20000	file: yyy operation: write address: 03458 length: 500

Operating System Concepts 2.9 Silberschatz and Galvin©1999

Direct Memory Access (DMA) Structure

- Used for high-speed I/O devices able to transmit information at close to memory speeds.
- Device controller transfers blocks of data from buffer storage directly to main memory without CPU intervention.
- Only one interrupt is generated per block, rather than the one interrupt per byte.

Operating System Concepts 2.10 Silberschatz and Galvin©1999







Storage Structure

- Main memory – only large storage media that the CPU can access directly.
- Secondary storage – extension of main memory that provides large nonvolatile storage capacity.
- Magnetic disks – rigid metal or glass platters covered with magnetic recording material
 - Disk surface is logically divided into *tracks*, which are subdivided into *sectors*.
 - The *disk controller* determines the logical interaction between the device and the computer.

Operating System Concepts 2.11 Silberschatz and Galvin©1999

Moving-Head Disk Mechanism

Operating System Concepts 2.12 Silberschatz and Galvin©1999

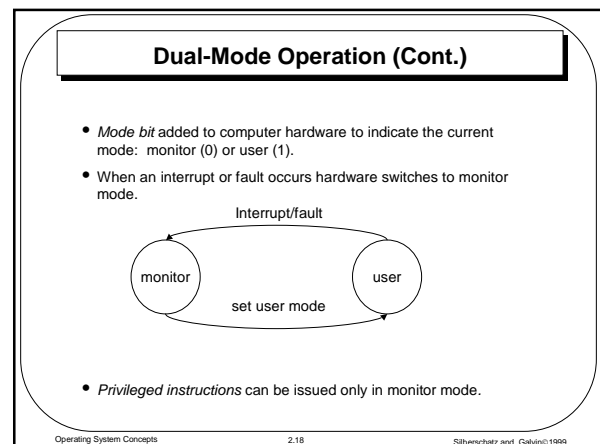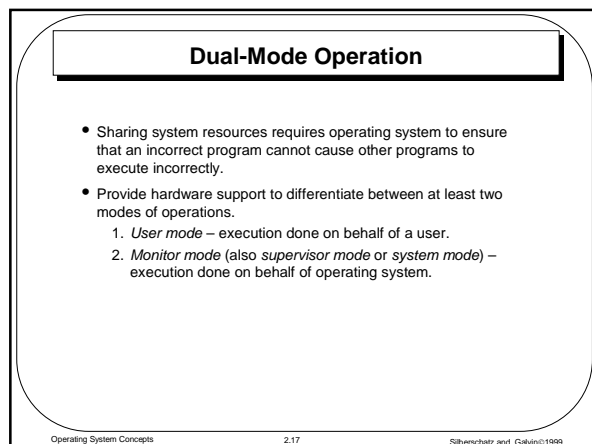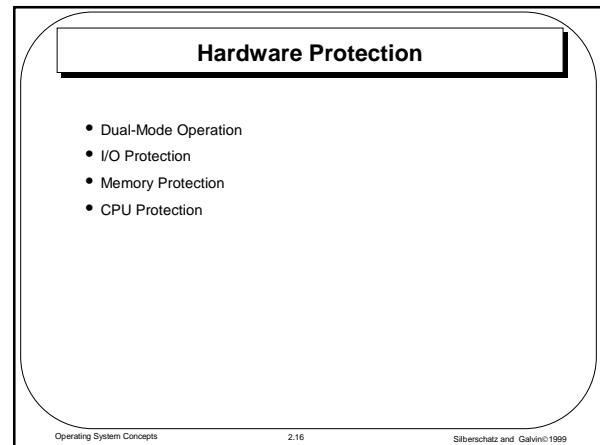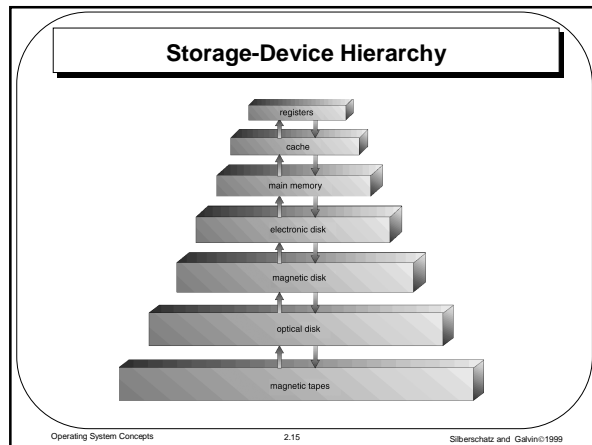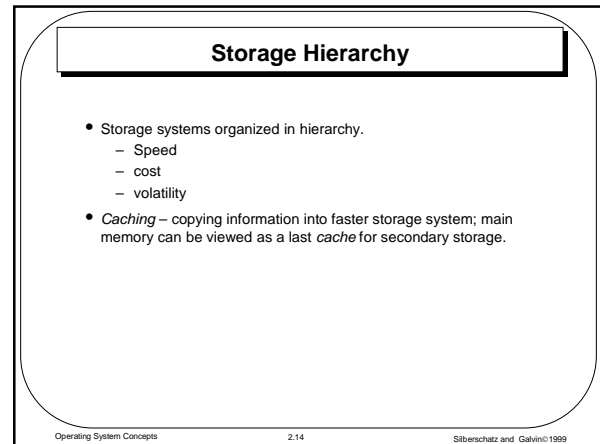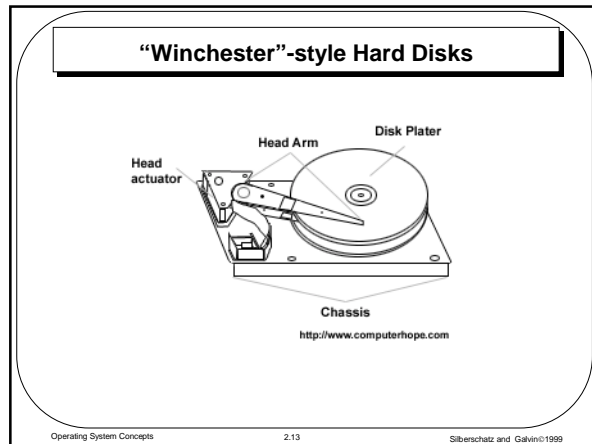

I/O Protection

- All I/O instructions are privileged instructions.
- Must ensure that a user program could never gain control of the computer in monitor mode (i.e., a user program that, as part of its execution, stores a new address in the interrupt vector).

Operating System Concepts 2.19 Silberschatz and Galvin©1999

Memory Protection

- Must provide memory protection at least for the interrupt vector and the interrupt service routines.
- In order to have memory protection, add two registers that determine the range of legal addresses a program may access:
 - **base register** – holds the smallest legal physical memory address.
 - **limit register** – contains the size of the range
- Memory outside the defined range is protected.

Operating System Concepts 2.20 Silberschatz and Galvin©1999

A Base And A limit Register Define A Logical Address Space

Operating System Concepts 2.21 Silberschatz and Galvin©1999

Protection Hardware

- When executing in monitor mode, the operating system has unrestricted access to both monitor and user's memory.
- The load instructions for the *base* and *limit* registers are privileged instructions.

Operating System Concepts 2.22 Silberschatz and Galvin©1999

CPU Protection

- **Timer** – interrupts computer after specified period to ensure operating system maintains control.
 - Timer is decremented every clock tick.
 - When timer reaches the value 0, an interrupt occurs.
- Timer commonly used to implement time sharing.
- Time also used to compute the current time.
- Load-timer is a privileged instruction.

Operating System Concepts 2.23 Silberschatz and Galvin©1999

General-System Architecture

- Given the I/O instructions are privileged, how does the user program perform I/O?
- **System call** – the method used by a process to request action by the operating system.
 - Usually takes the form of a trap to a specific location in the interrupt vector.
 - Control passes through the interrupt vector to a service routine in the OS, and the mode bit is set to monitor mode.
 - The monitor verifies that the parameters are correct and legal, executes the request, and returns control to the instruction following the system call.

Operating System Concepts 2.24 Silberschatz and Galvin©1999

